Rechargeable Working Light

User Manual



Caution: Read all instructions and warnings before operating.

*SAVE THESE INSTRUCTIONS! READ ALL INSTRUCTIONS

WARRANTY

- 1. **DO NOT** look directly into the light.
- DO NOT plug in with wet or damp hand or when you standing on a wet or damp surface or in water.


- 3. **DO NOT** cover the light, such as cloth or paper.
- 4. **DO NOT** drop the light.
- DO NOT close the source of fire, or high temperature location, such as flammable or explosive atmospheres.
- 6. KEEP OUT OF REACH OF CHILDREN AND ANIMALS.
- Please use the specification within the power of 90~265V.
- 8. Please un-plug after use.
- 9. When using the ring hook, please firmly fixed.
- Allow the light to fully cool down before storage or charging.
- Do not disassembled or modified without professional

ACCESSORIES OPERATION

 360° Rotating head Clipper for the table or pipe:

Take the rotating head clipper
Releasing the quick released handle to adjust the clipper
Placing on the edge of table or pipe, screw in to tighten
Placing the handle in the right position and clamping

2. Light direction adjustment:



3. Ring Hook:



Pull up the ring, place the light then can be hanging at.

4. Aluminum Handle:




Screw in the washer into the handle.




Screw in the handle on the bottom of the light

5. Magnet base

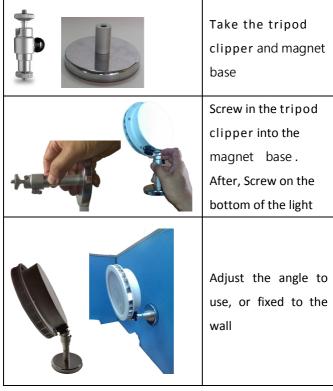


Can be adsorbed on any metal surface

6. touchable Power Switch for light:



7. touchable USB Switch for USB output:



8. Battery lighting indication

\(\frac{\dagger}{\dagger}\dagger\)	Touch the left side lighting mark
Ý P	Yellow Green light: 3 lights: Full battery capacity
THE STATE OF THE S	2 Yellow Green lights: Medium battery capacity
TO THE PARTY OF TH	Red light: Low battery, please charge
	Orange light: Battery in Charging
\(\frac{1}{4}\)\(\fra	Flash Orange light(10 sec per time): Full battery

SPECIFICATIONS

Model No.IWL-17050-BA

Input voltage	V	9~ 25Vdc
Input current	mA	600
Bulb	type	LED
Power Consumption	Watt	15
Beam Angle		120°
Battery	hrs	3~4
Battery capacity	mAh	6600 Lithium
Brightness	Lm	Portable light 1250lm
Unit weight	g	660g
Operation Temperature	°C	-30 ~50
Product Size	mm	§ 175*52
IP Code	IP65	rproof USB and DC- jack cover
		Screws fixed outside of the
		waterproof ring
Application Area		Indoor and outdoor
USB Output		USB: Max. 5V 2A Output

Charger (AC to DC Adaptor): IWL-A-2A

Power Cord Length 120~180 mm

Input: 90~265Vdc

Output: 12V 2A

DC Jack O.D.:5.5 . I.D.:2.1

Car charge Cable: IWL-A-1CC

LINE type 1M 5A fuse

Accessories		
Rotating head clipper	1	
Hook	1	
Aluminum Handle	1	
Magnet base	1	
Car charge Cable	1	
Protect tool box	1	

ONE-YEAR FULL WARRANT ON WORKLIGHT

WARRANT:

If this product fails due to a defect in material or workmanship within one year from the date of purchase, and it will be replaced free of charge.

Warranty Considerations:

following situations, although the effective warranty period, without free guarantee:

- (1) Due to natural disaster, disaster nuisance pest, lightning strike, flooding, earthquakes and according to the specified voltage failure or damage resulting from use of those.
- (2) Improper repair, use, modification or decomposition occurred bumps or failure.
 - (3) Consumables and accessories
- (4) If the certificate is not real record, blank, damaged, lost, illegible or altered cause computer without login or companies who had sold the company to the factory six months after the date of extension of the guarantee period.
 - (5) Used in the products business and public places.
 - (6) This warranty items mentioned, not filled date of purchase,

altered or illegible persons.

Store:

(7) Special environment does not guarantee, such as sulfur areas, seaside high salinity, methane, chemical corrosion and erosion areas on board and so easy to use.

Product Type	IWL17050-BA	
Warranty	Date of purchase	one year
Period		
Date of purchase		
Product No.		
Purchaser		
address		
Contact Number		
Email		
Fault status		